

Nr.: **BOSI220530bJ**


Commissioner Borosil Renewables Limited
Ankkleshwa Raj Pipala Road, Village-Govali
Taluka-Jaghadia, Dist.-Bharuch
State Gujarat
India

Test Material Selene-Anti Glare Glass (3.2 mm) Smooth side, with Lighttrap
Anl. 19.5.2022 (prism side measured) - Set 3

Test Method BRDF of front side (light trap attached to back side)

Results Reflected luminance at bright sunshine*: $L_{v,10^\circ} = 10'500 \text{ cd/m}^2$
(near normal incidence of 100'000 lx)

Scattering plot for bright sunshine (100'000 lx) for an incident angle of 10°:

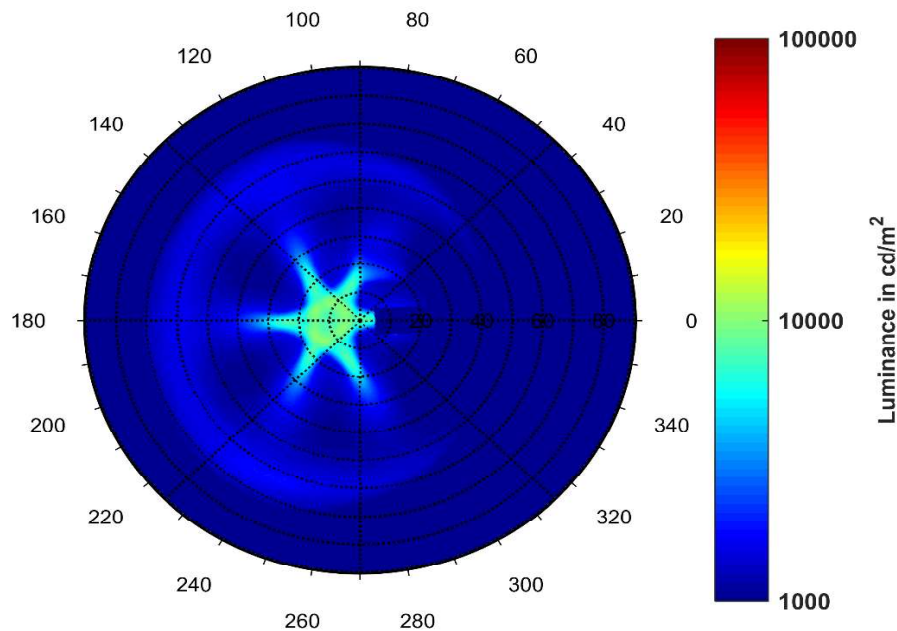

* 20'000 cd/m² allowed for airport installations: "Certification Specifications and Guidance Material for Aerodromes Design", CS-ADR-DSN, Issue 2, 29 January 2015